

ESPECIFICACIONES TÉCNICAS

PW-5125

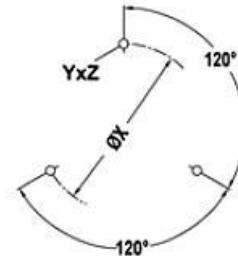
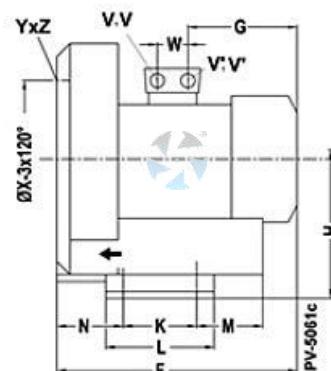
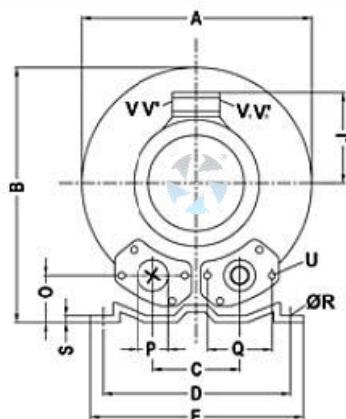


PUMPOWER®

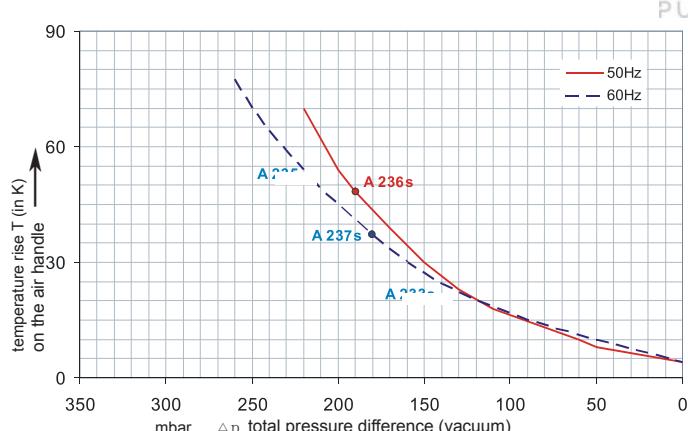
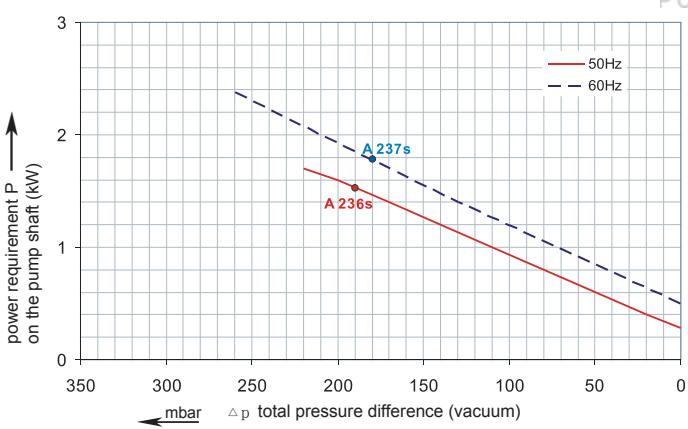
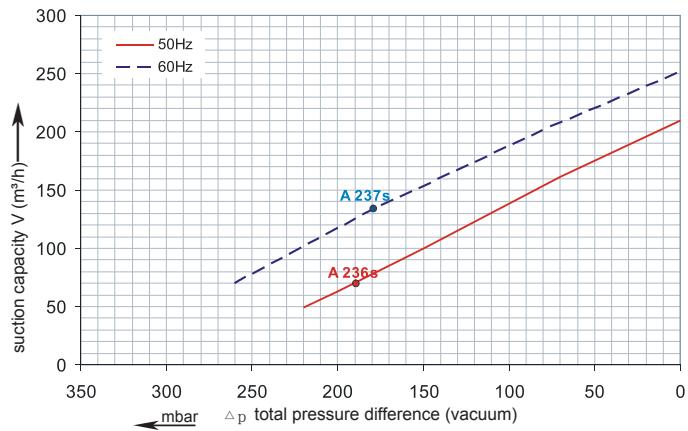
REFERENCIA	PW-5125
POTENCIA	2,35 HP / 1,75 kW
TENSIÓN REQUERIDA / FRECUENCIA	110 V o 220 V a 60 Hz / MONOFÁSICO
NIVEL PRESIÓN ACÚSTICA	70 dB (A)
MÁXIMO FLUJO DE AIRE (Q.MAX)	255 m ³ /h 150 pie ³ /min
VACÍO MÁXIMO	-180 mBar
PRESIÓN MÁXIMA	180 mBar 2,61 psi 0,18 Bar 18,0 kPa
PROFUNDIDAD MAX.	1,6 m.c.a. [metro columna de agua]
VELOCIDAD	3445 rpm
DIÁMETROS: ENTRADA / SALIDA	2 pulg. X 2 pulg.
AMP. CON CARGA	110 V 24 A / 220 V 12 A
PESO	29 kg
DIMENSIONES CAJA	30 cm x 50 cm x 50 cm



Dimension for Side Channel Blower

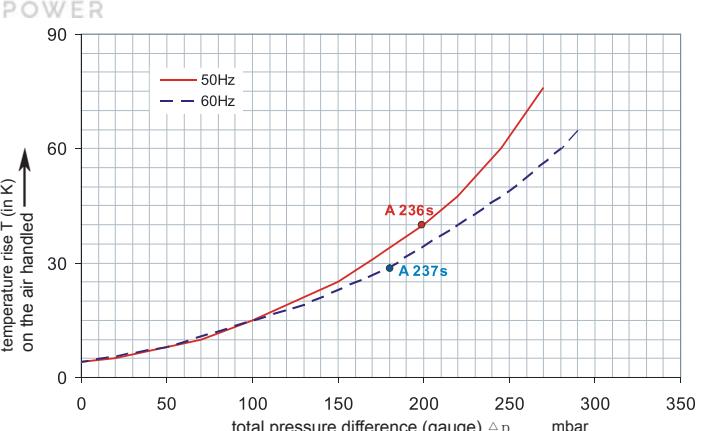
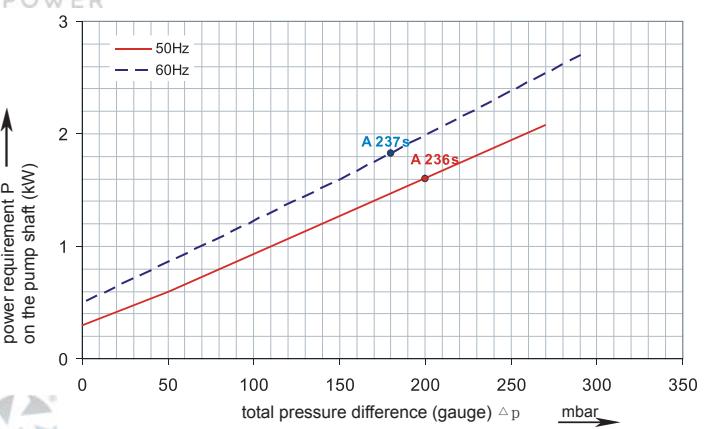
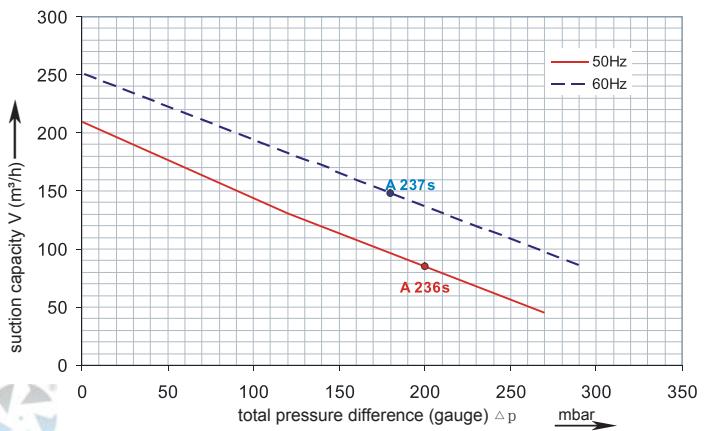


Type	Phases	A	B	C	D	E	F
PW-5125	1~	334	337	120	260	295	345
G	H	J	K	L	M	N	O
191	175	128	115	155	96	87	78
P	Q	ØR	S	U	V1	V1(3-)	V1(3-)
55	83	14	4	M8×17	M16×1.5	—	—
W	ØX	Y_Z	X-Holes				
29	200	M8×20	0°/120°/240°				

PW
Performance curve for Vacuum pump


The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of +/- 10 %. The total pressure differences are valid for suction and ambient temperatures up to 25 °C.

For other conditions please confer with us.

PW-5125
Performance curve for Compressor


Each PW type can be applied both as vacuum pump and compressor in continuous operation over the total stated performance curve range. The motors are available as standard for the input voltage range of 50 and 60 Hz and for protection category IP 55 as well as approved for UL and CSA.

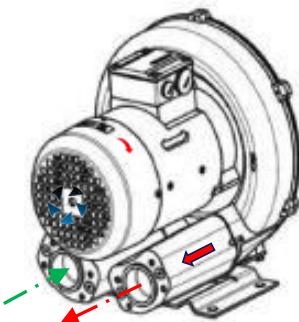
Selection and ordering data
Type PW5135

Curve No.	Order No.	Frequency Hz	Rated power kW	Input voltage V	Input current A	Permissible total differential pressure ²⁾ Vacuum mbar	Compressor mbar	Sound pressure level ³⁾ dB(A)	Weight ca. kg
1~ 50/60 Hz IP55 with attached condenser for continuous operation									
A 236s	PW-5125	50	1.5	110	220	22.0	11.0	-190	200
A 237s	PW-5125	60	1.75	110	220	24.0	12.0	-180	180

1~ 50/60 Hz IP55 with attached condenser for continuous operation

A 236s	PW-5125	50	1.5	110	220	22.0	11.0	-190	200	64	26
A 237s	PW-5125	60	1.75	110	220	24.0	12.0	-180	180	70	26

IN

OUT

PUMPOWER

Other voltage ranges

PW-5125		<input type="checkbox"/>	<input type="checkbox"/>
50Hz	60Hz	↑	↑
3~			
185...225 V D/320...390 V Y 200...240 V D/345...415 V Y 345...415 V D	200...240 V D/345...415 V Y 200...275 V D/380...480 V Y 380...480 V D	H 1 H 6 H 7	
500 V D	575VD	C 5	
Machines according to the ATEX norm 94/4 EG are available for the whole performance range.			
Following types available: Category 3 G, 3/2 G, 3 D and 3/2 D.			
1~			
100 / 200 V 115 / 230 V	100 / 200 V 115 / 230 V	V 4 V 5	
230V	230V	A 1	

Further voltage range on request; please quote in plain text.

All PW achieve the standards and norms of the low voltage directive (LVD)2006/95/EC, rotating electrotechnical motor EN 60034-1-2004, electromagnetic compatibility(EMC)EN55014-1/2,EN61000-2/-3/-4/-6.

- 1) For standard UL for ELECTRIC MOTOR UL 1004-1.
- 2) Relief-valve are available for limiting differential pressure.
- 3) Measuring-surface sound-pressure level acc. to DIN EN 21680, measured at a distance of 1 m. The pump is throttled to an average suction pressure, a hose is connected to the discharge side (compressor) / suction side (vacuum pump), but is not fitted with relief valves.

The motors are designed according to the DIN EN 60 034 / DIN IEC 34-1 and temperature class F.

For the three phase machines the tolerances are +/- 10 % for fixed voltage and +/- 5 % for voltage range.

The single phase machines are designed with a +/- 5 % tolerances. If only 90 % of the maximum allowed pressure will be used for the continuous operating then the allowed voltage range add to +/- 10 %.

For all single and three phase machines which designed according to the UL and CSA norm (UL 1004-1) the maximum allowed voltage tolerances are - 10 % resp. + 6 %.

The frequency tolerance is maximum +/- 2 %.



PUMPOWERTM

BLOWER INDUSTRIAL

- Fabricados con tecnología alemana.
- Equipos de caudal - alto flujo de aire [2.500 m³/h].
- Equipos de alta presión [1.000 mBar].
- Libre de mantenimiento.
- Niveles de ruido bajo.
- Rodamientos originales de alta calidad.
- Funcionamiento libre de aceites, aire limpio.
- Fácil instalación.
- Precio competitivo.
- Diferentes diseños incluyendo una etapa, dos etapas y tres etapas.
- Garantía Amplia.
- Diferentes tipos de conexión: monofásica 110V - 220V, trifásica 220V - 440V.
- Algunas aplicaciones:
 - Oxigenación en estanques diseñados para la piscicultura, acuicultura y/o afines, en tierra y/o geomembrana.
 - Aireación y extracción de gases en la minería.
 - Secado de pintura automotriz.
 - Aspiradoras industriales para lavaderos de carros.
 - Oxigenación en plantas de tratamiento de aguas residuales.
 - Secado de papel.
 - Entre otros.



- | | |
|---|--|
| 1 Tapa posterior del Blower. | 6 Flecha de dirección del transporte del fluido. |
| 2 Tapa delantera del Blower. | 7 Flecha que indica el sentido de rotación. |
| 3 Conexión - ducto de succión/vacío. | 8 Motor asincrónico. |
| 4 Conexión - ducto de descarga/presión. | 9 Tapa del ventilador. |
| 5 Base para instalación. | 10 Caja de bornes/terminales. |

