

ESPECIFICACIONES TÉCNICAS PW-7136S



PUMPOWER[®]


REFERENCIA	PW-7136S
POTENCIA	6,17 HP / 4,60 kW
TENSIÓN REQUERIDA / FRECUENCIA	220 V o 440 V a 60 Hz / TRIFÁSICO
NIVEL PRESIÓN ACÚSTICA	72 dB (A)
MÁXIMO FLUJO DE AIRE (Q. MAX)	376 m ³ /h 221,31 pie ³ /min
VACÍO MÁXIMO	-320 mBar
PRESIÓN MÁXIMA	310 mBar
	4,50 psi
	0,31 Bar
	31,0 kPa
PROFUNDIDAD MAX	3,0 m.c.a. [metro columna de agua]
VELOCIDAD	3460 rpm
DIÁMETROS: ENTRADA / SALIDA	2 pulg. X 2 pulg.
AMP. CON CARGA	220V 16,4 A / 440V 9,5 A.
PESO	42 kg
DIMENSIONES CAJA	44,5 cm x 44 cm x 47 cm

*Aplicaciones de Vacío
(Succión - Aspirado)
Diseño Especial*



**Blower de succión de cubierta,
no cuenta con los ductos de
entrada y salida, no trae base.*

Dimension for Side Channel Blower

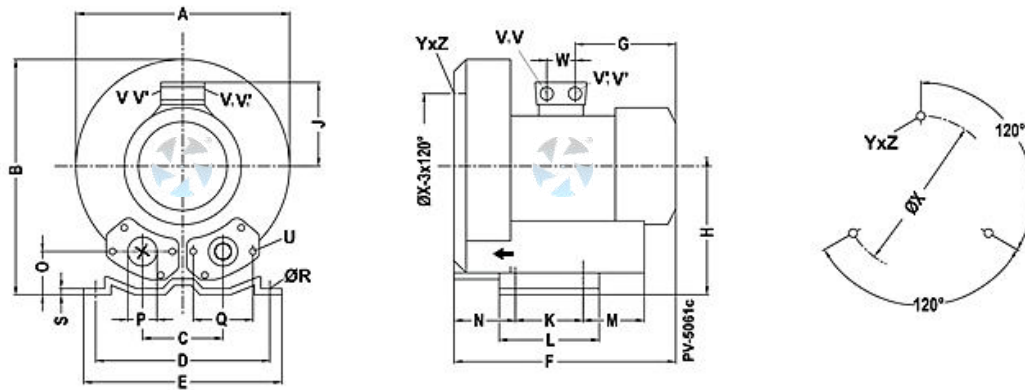


Type	Phases	A	B	C	D	E	F
PW-7136S	3~	360	366	122	284	325	432
G	H	J	K	L	M	N	O
209	197	148	140	180	84	109	54
P	Q	φR	S	U	V1	V1(3-)	V'1(3-)
55	83	15	4.5	M8×17	M32×1.5	M32×1.5	M32×1.5
W	φX	Y_Z	X-Holes				
42	240	M10×20	0°/120°/240°				

Note: Model offerings and design parameters may change without notice.








PW-7136S

Performance curve for Vacuum pump

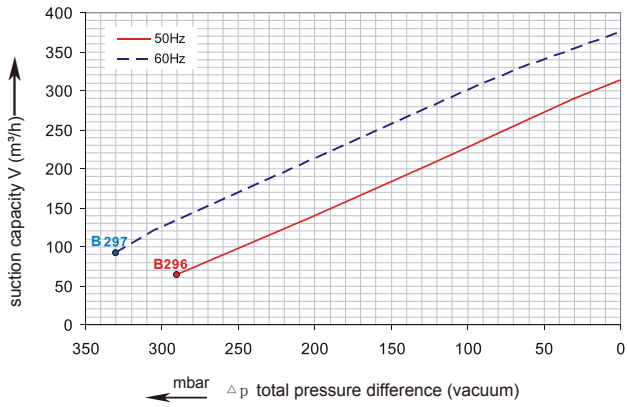

Performance curve for Compressor

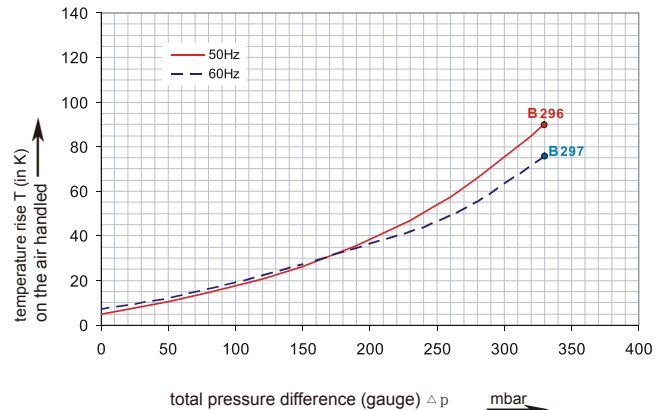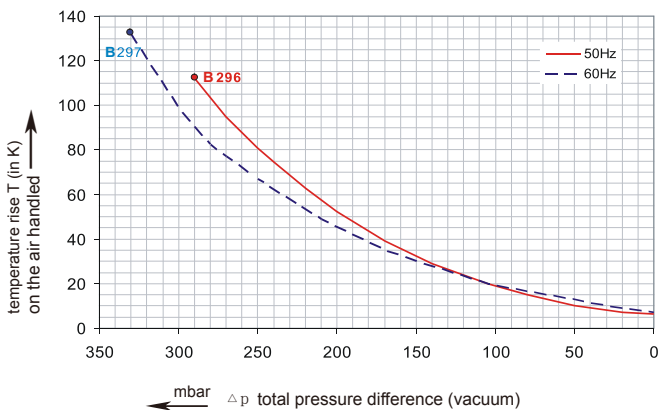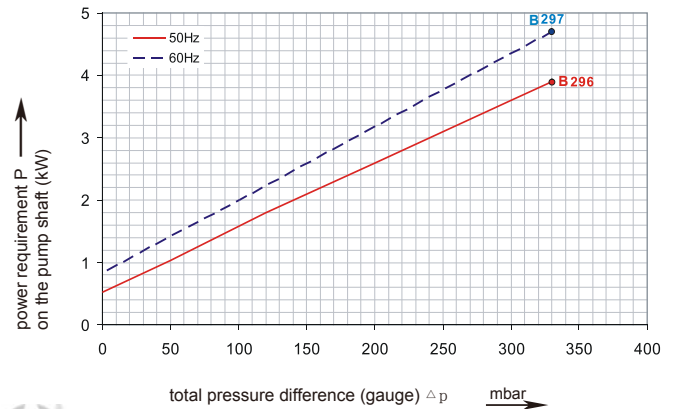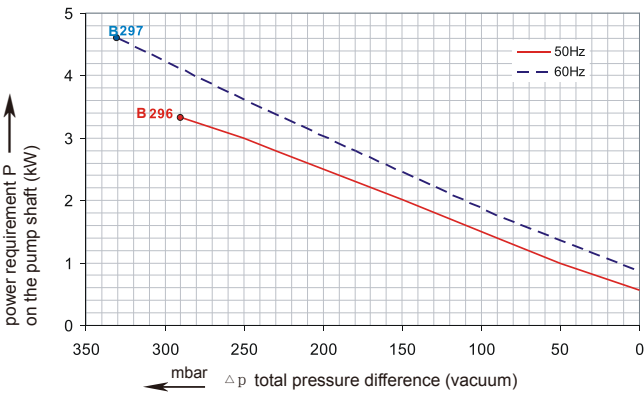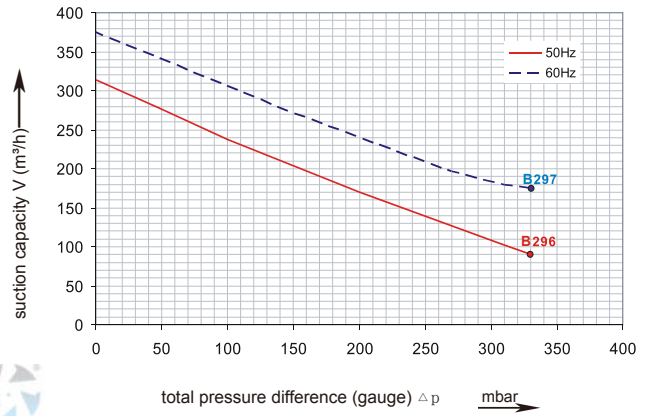


The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of +/- 10 %.
The total pressure differences are valid for suction and ambient temperatures up to 25 °C.
For other conditions please confer with us.

Each PW type can be applied both as vacuum pump and compressor in continuous operation over the total stated performance curve range. The motors are available as standard for the input voltage range of 50 and 60 Hz and for protection category IP 55.

Selection and ordering data
Type PW-7136S

Curve No.	Order No.	Fre- quency	Rated power	Input voltage		Input current		Permissible total differential pressure ²⁾		Sound pressure level ³⁾	Weight ca.
		Hz	kW	V		A		Vacuum mbar			kg
3~ 50/60 Hz IP55 insulation material class F 1)											
A 296	PW-7136S	50	4.0	200D ... 240D	345Y...415Y	16.4D	9.5Y	-290	330	69	40
A 297	PW-7136S	60	4.6	220D ... 275D	380Y...480Y	16.4D	9.5Y	-330	330	72	40

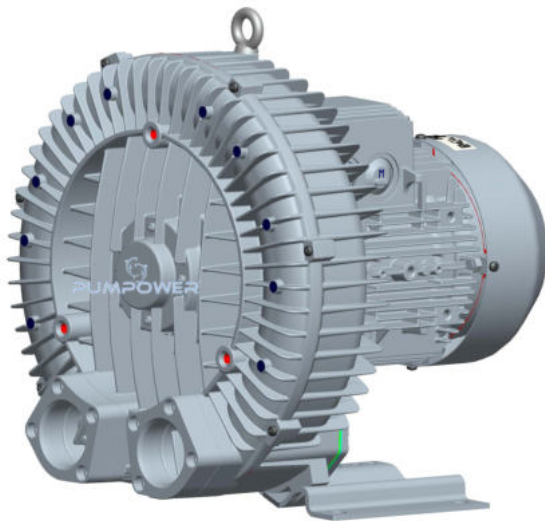

Other voltage ranges		
<input type="checkbox"/> <input type="checkbox"/>		
50Hz	60Hz	↑ ↑
3~		
185...225 V D/320...390 V Y 200...240 V D/345...415 V Y 345...415 V D	200...240 V D/345...415 V Y 200...275 V D/380...480 V Y 380...480 V D	
500 V D	575VD	
Machines according to the ATEX norm 94/4 EG are available for the whole performance range. Following types available: Category 3 G, 3/2 G, 3 D and 3/2 D.		
1~		
100 / 200 V 115 / 230 V	100 / 200 V 115 / 230 V	V 4 V 5
230V	230V	A 1

Further voltage range on request; please quote in plain text.

All PW achieve the standards and norms of the low voltage directive (LVD)2006/95/EC, rotating electrotechnical motor EN 60034-1-2004, electromagnetic compatibility(EMC)EN55014-1/2,EN61000-2/-3/-4/-6.

- 1) For standard UL for ELECTRIC MOTOR UL 1004-1.
- 2) Relief-valve are available for limiting differential pressure.
- 3) Measuring-surface sound-pressure level acc. to DIN EN 21680, measured at a distance of 1 m. The pump is throttled to an average suction pressure, a hose is connected to the discharge side (compressor) / suction side (vacuum pump), but is not fitted with relief valves.

The motors are designed according to the DIN EN 60 034 / DIN IEC 34-1 and temperature class F.

For the three phase machines the tolerances are +/- 10 % for fixed voltage and +/- 5 % for voltage range.

The single phase machines are designed with a +/- 5 % tolerances. If only 90 % of the maximum allowed pressure will be used for the continuous operating then the allowed voltage range add to +/- 10 %.

For all single and three phase machines which designed according to the UL and CSA norm (UL 1004-1) the maximum allowed voltage tolerances are - 10 % resp. + 6 %.

The frequency tolerance is maximum +/- 2 %.



PUMPOWER®

BLOWER INDUSTRIAL

- Fabricados con tecnología alemana.
- Equipos de caudal - alto flujo de aire [2.500 m³/h].
- Equipos de alta presión [1.000 mBar].
- Libre de mantenimiento.
- Niveles de ruido bajo.
- Rodamientos originales de alta calidad.
- Funcionamiento libre de aceites, aire limpio.
- Fácil instalación.
- Precio competitivo.
- Diferentes diseños incluyendo una etapa, dos etapas y tres etapas.
- Garantía Amplia.
- Diferentes tipos de conexión: monofásica 110V - 220V, trifásica 220V - 440V.
- Algunas aplicaciones:
 - Oxigenación en estanques diseñados para la piscicultura, acuicultura y/o afines, en tierra y/o geomembrana.
 - Aireación y extracción de gases en la minería.
 - Secado de pintura automotriz.
 - Aspiradoras industriales para lavaderos de carros.
 - Oxigenación en plantas de tratamiento de aguas residuales.
 - Secado de papel.
 - Entre otros.

- | | |
|---|--|
| 1 Tapa posterior del Blower. | 6 Flecha de dirección del transporte del fluido. |
| 2 Tapa delantera del Blower. | 7 Flecha que indica el sentido de rotación. |
| 3 Conexión - ducto de succión/vacío. | 8 Motor asíncrono. |
| 4 Conexión - ducto de descarga/presión. | 9 Tapa del ventilador. |
| 5 Base para instalación. | 10 Caja de bornes/terminales. |

