

ESPECIFICACIONES TÉCNICAS

PW-5326

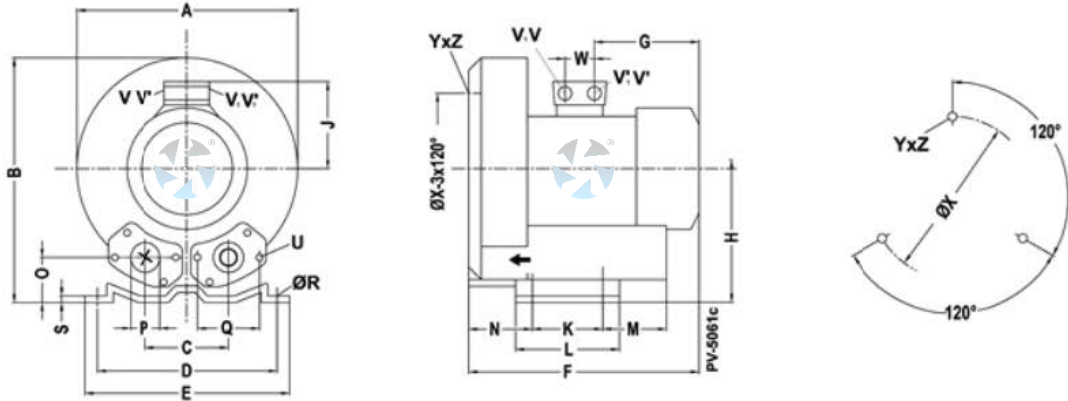


PUMPOWER[®]

| REFERENCIA | PW-5326 |
|--------------------------------|---|
| POTENCIA | 2,75 HP / 2,1 kW |
| TENSIÓN REQUERIDA / FRECUENCIA | 220 V o 440 V a 60 Hz / TRIFÁSICO |
| NIVEL PRESIÓN ACÚSTICA | 71 dB (A) |
| MÁXIMO FLUJO DE AIRE (Q. MAX) | 330 m ³ /h 194,23 pie ³ /min |
| VACÍO MÁXIMO | -160 mBar |
| PRESIÓN MÁXIMA | 150 mBar |
| | 2,18 psi |
| | 0,15 Bar |
| | 15,0 kPa |
| PROFUNDIDAD MAX | 1,3 m.c.a. [metro columna de agua] |
| VELOCIDAD | 3450 rpm |
| DIÁMETROS: ENTRADA / SALIDA | 2 pulg. X 2 pulg. |
| AMP. CON CARGA | 220V 7,6 A / 440V 4,4 A. |
| PESO | 25 kg |
| DIMENSIONES CAJA | 41 cm x 37 cm x 38 cm |

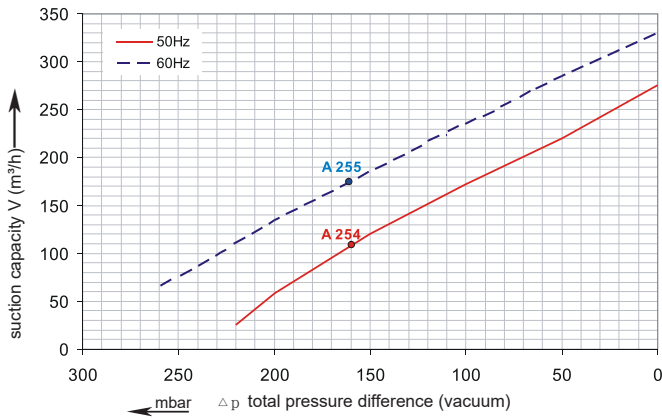
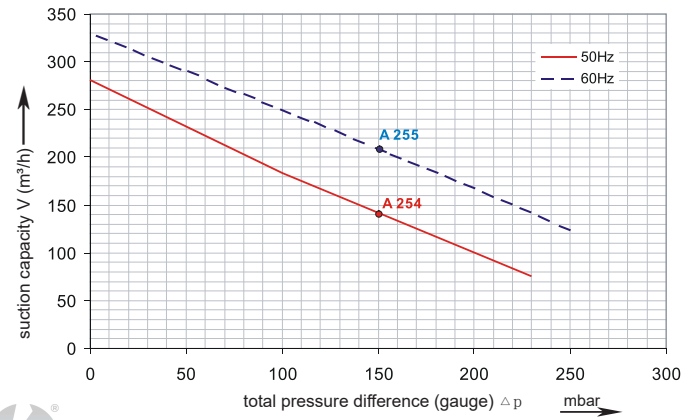
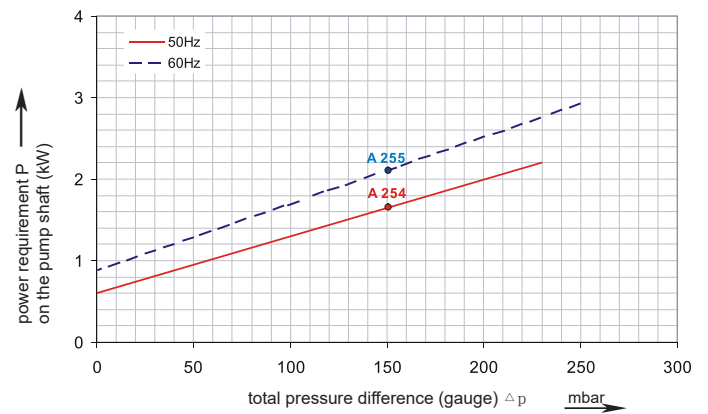
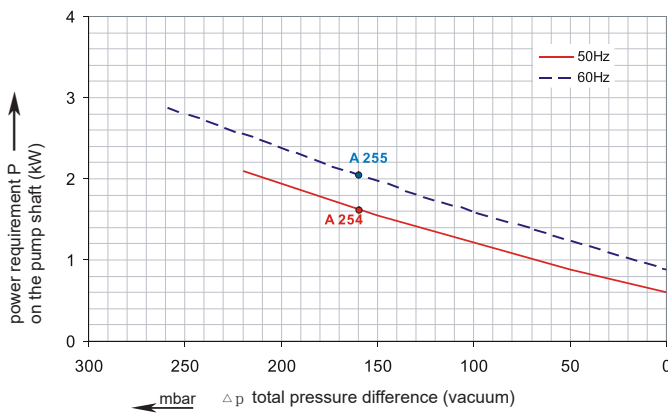
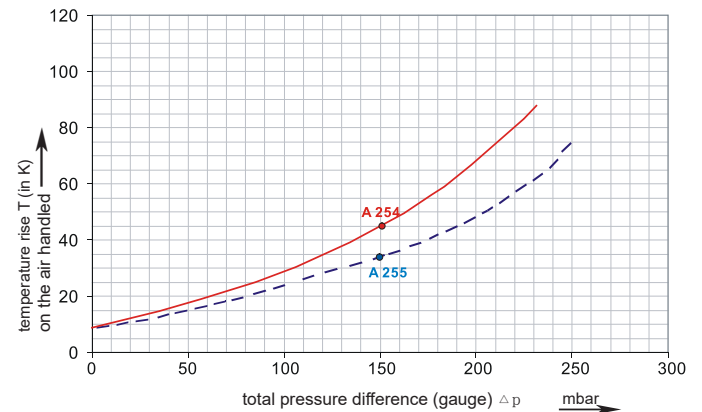
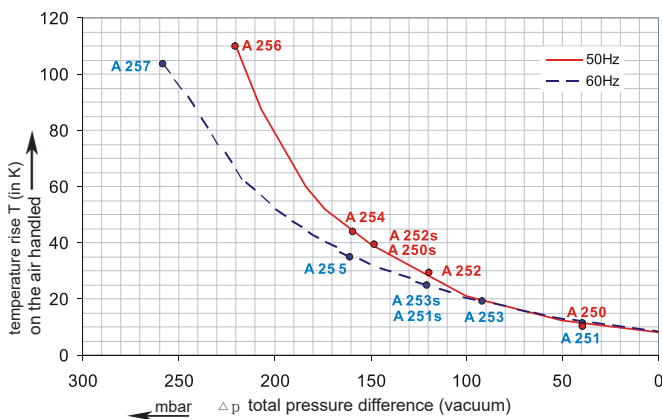


Dimension for Side Channel Blower



| Type | Phases | A | B | C | D | E | F |
|---------|--------|-------|--------------|-------|-----|---------|---------|
| PW-5326 | 3~ | 334 | 337 | 120 | 260 | 295 | 365 |
| G | H | J | K | L | M | N | O |
| 191 | 175 | 128 | 115 | 155 | 96 | 87 | 48 |
| P | Q | φR | S | U | V1 | V1(3-) | V'1(3-) |
| 55 | 83 | 14 | 4 | M8×17 | — | M25×1.5 | M16×1.5 |
| W | φX | Y_Z | X-Holes | | | | |
| 29 | 200 | M8×20 | 0°/120°/240° | | | | |

Note: Model offerings and design parameters may change without notice.

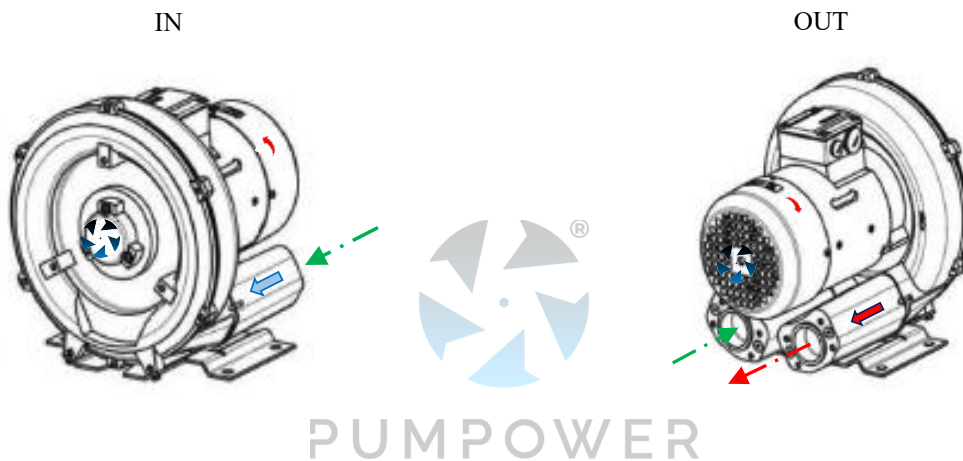
Performance curve for Vacuum pump

Performance curve for Compressor

PUMPOWER

PUMPOWER


The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of +/- 10 %. The total pressure differences are valid for suction and ambient temperatures up to 25 °C. For other conditions please confer with us.

Each PW type can be applied both as vacuum pump and compressor in continuous operation over the total stated performance curve range. The motors are available as standard for the input voltage range of 50 and 60 Hz and for protection category IP 55 as well as approved for UL and CSA.

Selection and ordering data
Type PW-53

| Curve No. | Order No. | Frequency Hz | Rated power kW | Input voltage V | Input current A | Permissible total differential pressure ²⁾ | | Sound pressure level ³⁾ dB(A) | Weight ca. kg | | |
|---|-----------|-----------------|-------------------|--------------------|--------------------|---|--------------------|---|------------------|----|----|
| | | | | | | Vacuum mbar | Compressor mbar | | | | |
| 3~ 50/60 Hz IP55 isolation material class F 1) | | | | | | | | | | | |
| A 254 | PW-5326 | 50 | 1.6 | 200D ... 240D | 345Y...415Y | 7.5D | 4.3Y | -160 | 150 | 65 | 24 |
| A 255 | PW-5326 | 60 | 2.05 | 220D ... 275D | 380Y...480Y | 7.6D | 4.4Y | -160 | 150 | 71 | 24 |



| Other voltage ranges | | |
|--|-----------------------------|---|
| | | PW-5326 <input type="checkbox"/> <input type="checkbox"/> |
| 50Hz | 60Hz | ↑ ↑ |
| 3~ | | |
| 185...225 V D/320...390 V Y | 200...240 V D/345...415 V Y | H 1 |
| 200...240 V D/345...415 V Y | 200...275 V D/380...480 V Y | H 6 |
| 345...415 V D | 380...480 V D | H 7 |
| 500 V D | 575VD | C 5 |
| Machines according to the ATEX norm 94/4 EG are available for the whole performance range. Following types available: Category 3 G, 3/2 G, 3 D and 3/2 D. | | |
| 1~ | | |
| 100 / 200 V | 100 / 200 V | V 4 |
| 115 / 230 V | 115 / 230 V | V 5 |
| 230 V | 230V | A 1 |

Further voltage range on request; please quote in plain text.

All PW achieve the standards and norms of the low voltage directive (LVD)2006/95/EC, rotating electrotechnical motor EN 60034-1-2004, electromagnetic compatibility(EMC)EN55014-1/2,EN61000-2/-3/-4/-6.

- 1) For standard UL for ELECTRIC MOTOR UL 1004-1.
- 2) Relief-valve are available for limiting differential pressure.
- 3) Measuring-surface sound-pressure level acc. to DIN EN 21680, measured at a distance of 1 m. The pump is throttled to an average suction pressure, a hose is connected to the discharge side (compressor) / suction side

The motors are designed according to the DIN EN 60 034 / DIN IEC 34-1 and temperature class F.

For the three phase machines the tolerances are +/- 10 % for voltage and +/- 5 % for voltage range.

The single phase machines are designed with a +/- 5 % tolerances. If only 90 % of the maximum allowed pressure will be used for the continuous operating then the allowed voltage range add to +/- 10 %.

For all single and three phase machines which designed according to the UL and CSA norm (UL 1004-1) the maximum allowed voltage tolerances are - 10 % resp. + 6 %.

The frequency tolerance is maximum +/- 2 %.



PUMPOWER®

BLOWER INDUSTRIAL

- Fabricados con tecnología alemana.
- Equipos de caudal - alto flujo de aire [2.500 m³/h].
- Equipos de alta presión [1.000 mBar].
- Libre de mantenimiento.
- Niveles de ruido bajo.
- Rodamientos originales de alta calidad.
- Funcionamiento libre de aceites, aire limpio.
- Fácil instalación.
- Precio competitivo.
- Diferentes diseños incluyendo una etapa, dos etapas y tres etapas.
- Garantía Amplia.
- Diferentes tipos de conexión: monofásica 110V - 220V, trifásica 220V - 440V.
- Algunas aplicaciones:
 - Oxigenación en estanques diseñados para la piscicultura, acuicultura y/o afines, en tierra y/o geomembrana.
 - Aireación y extracción de gases en la minería.
 - Secado de pintura automotriz.
 - Aspiradoras industriales para lavaderos de carros.
 - Oxigenación en plantas de tratamiento de aguas residuales.
 - Secado de papel.
 - Entre otros.

- | | |
|---|--|
| 1 Tapa posterior del Blower. | 6 Flecha de dirección del transporte del fluido. |
| 2 Tapa delantera del Blower. | 7 Flecha que indica el sentido de rotación. |
| 3 Conexión - ducto de succión/vacío. | 8 Motor asíncrono. |
| 4 Conexión - ducto de descarga/presión. | 9 Tapa del ventilador. |
| 5 Base para instalación. | 10 Caja de bornes/terminales. |

